


VP手动单通道移液器

Manual single-channel pipette



产品特点 Features

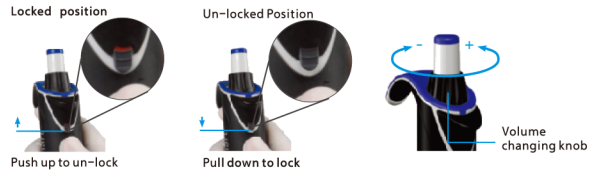

- 重量轻但坚固颜色编码方便识别
- 特殊工程塑料能更好的防化学和物理腐蚀
- 完全高压灭菌
- 增强耐紫外性，提高耐用性
- 经ISO 17025认证实验室校准，根据ISO 8655提供单独的质量控制和校准报告

手动单通道移液器参数表

Product parameters of single-channel pipette

型号	货号	颜色标识	量程 [ul]	最小增量 [ul]	测试体积 [ul]	系统误差 (±) ul	系统误差 (±) %	偶然误差 (≤) ul	偶然误差 (≤) %
VP2	SVA-125	●	0.1-2.5	0.002	0.2	0.016	8	0.012	6
					1	0.027	2.7	0.013	1.3
					2.5	0.03	1.2	0.014	0.56
VP10	SVA-100	●	0.5-10	0.02	1	0.025	2.5	0.012	1.2
					5	0.075	1.5	0.05	1
					10	0.1	1	0.04	0.4
VP50	SVA-200	●	5-50	0.1	5	0.15	1.5	0.04	0.8
					25	0.15	0.6	0.05	0.2
					50	0.12	0.24	0.06	0.12
VP100	SVA-500	●	10-100	0.1	10	0.15	1.5	0.1	1
					50	0.4	0.8	0.12	0.24
					100	0.8	0.8	0.15	0.15
VP1000	SVA-600	●	100-1000	1	100	0.8	0.8	0.3	0.3
					500	3	0.6	1	0.2
					1000	6	0.6	1.5	0.15
VP20	SVA-700	●	2-20	0.02	2	0.03	1.5	0.02	1
					10	0.1	1	0.05	0.5
					20	0.18	0.9	0.06	0.3
VP200	SVA-800	●	20-200	0.2	20	0.3	1.5	0.1	0.5
					100	0.8	0.8	0.25	0.25
					200	1.2	0.6	0.3	0.15
VP5000	SVA-905	●	500-5000	10	500	5	1	2	0.4
					2500	15	0.6	5	0.2
					5000	18	0.36	8	0.16
VP10000	SVA-1000	●	1000-10000	20	1000	30	3	6	0.6
					5000	40	0.8	10	0.2
					10000	60	0.6	15	0.15